

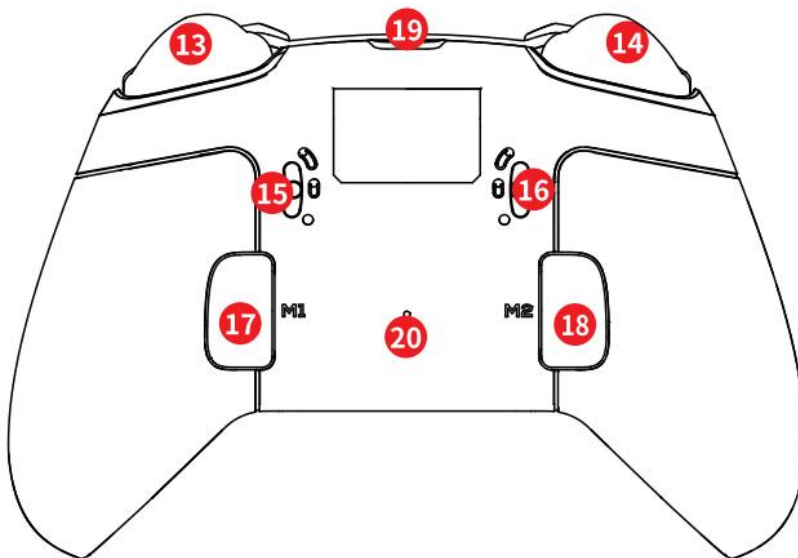


BTP-2650NS

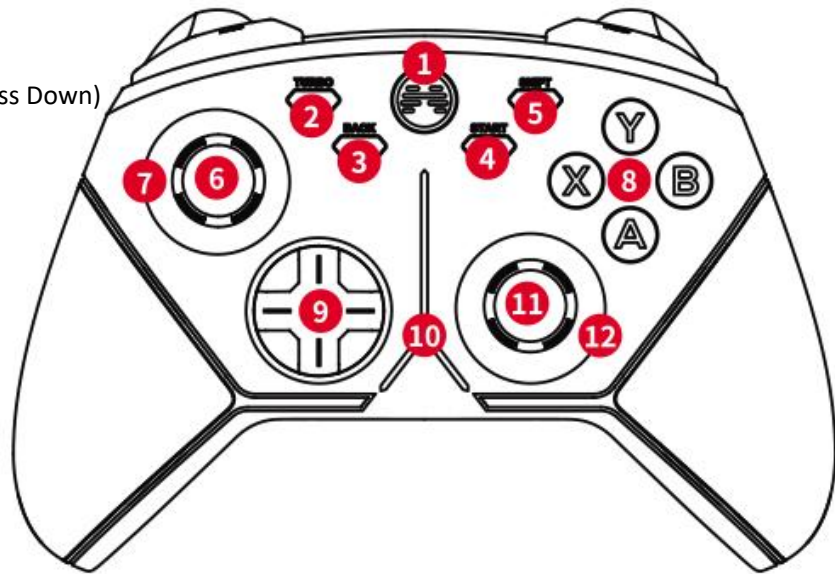

I KEY INTRODUCTION


- 1** LOGO Button
- 2** TURBO
- 3** BACK
- 4** START
- 5** SHIFT
- 6** Left Joystick/LS(Press Down)
- 7** Sensivity Knob
- 8** ABXY
- 9** D-Pad
- 10** Indicator Light
- 11** Right Joystick/RS-(Press Down)
- 12** Sensivity Knob

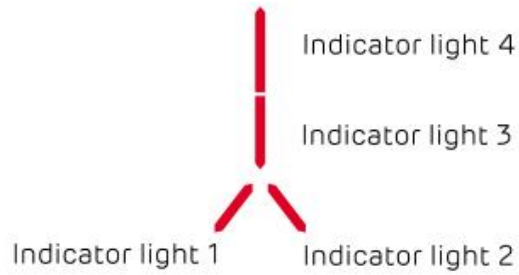


- 13** RT
- 14** LT
- 15** Trigger Lock
- 16** Trigger Lock
- 17** M1 Custom Button
- 18** M1 Custom Button
- 19** Type-C Port
- 20** Reset

II POWER ON/OFF**① [Power on]**

Press the BEITONG Logo button to turn on the Controller

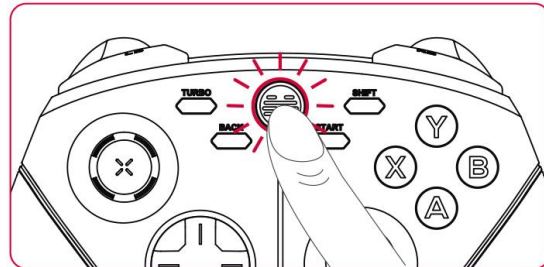**② [Power off]**

Press and hold the Back + B button for about 3 seconds, the Controller will be turned off

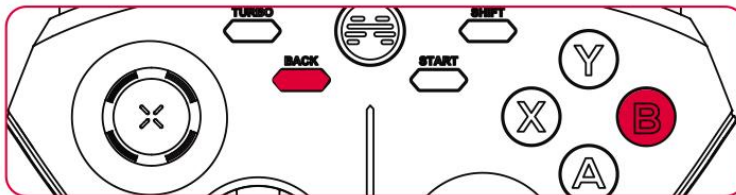**③ [Forced shutdown situation]**

※Under disconnected state:

Automatically shut down if the controller isn't connected successfully within 120s

※Under connected state:

Automatically shutdown if the controller isn't operated within 10 min

※Automatically shutdown if the controller is in low battery


Tips: Press RB + BACK + RS + LOGO Button in the power off state, pairing information can be actively cleared.

CONNECT TO NS

Step 1: Turn on the Switch Console, open up the controller screen, and then select "change grip/order"

Step 2: Make sure the controller is in the power-off state, press and hold the LB + LOGO Button until the breathing light start Multi-color cycling and then you can release it. After the light 3 and 4 turn blue 5 seconds, the controller pairs to Switch Console successfully.

Step 3: After the first successful connection, just press LB + LOGO Button to turn on the controller, it will automatically connect to the Switch Console.

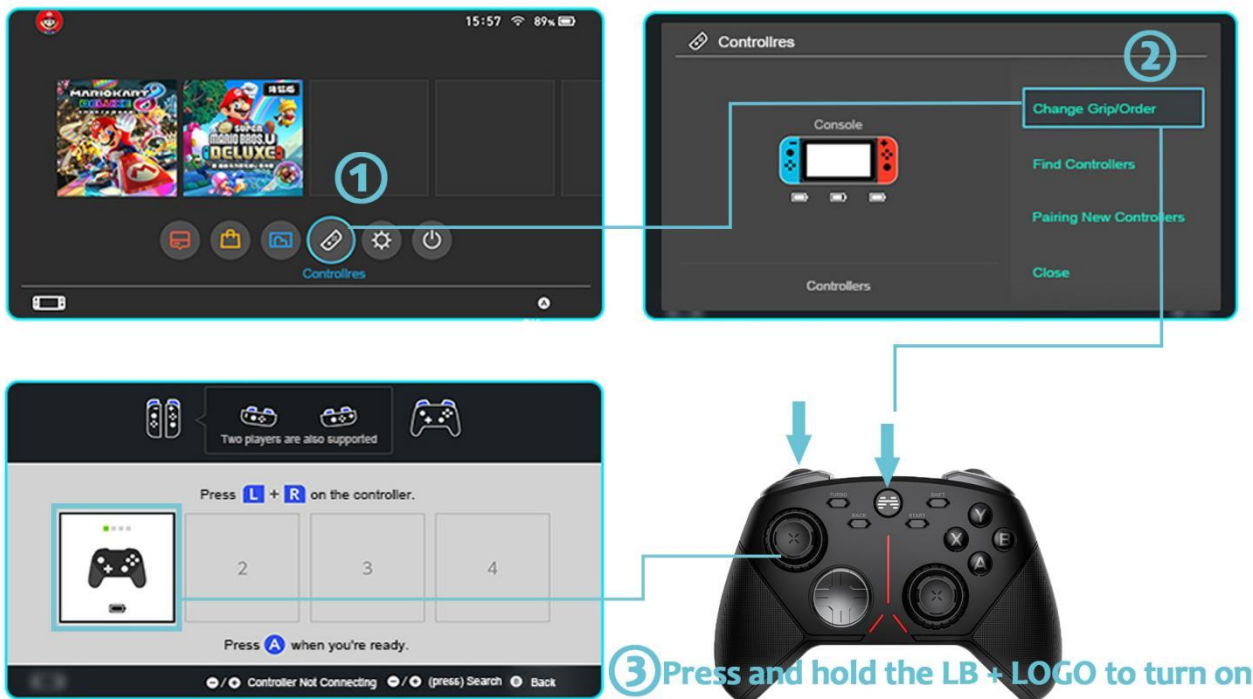

[If unable to connect, please try according to the below method.]

Step 1: Turn off the Screen of Switch Console and then turn on it again, go into system settings then scroll down until you see controllers and sensors and select that, scroll down again and select disconnect controllers and then at this screen you just long press the X button and it will remove all controllers that are paired to the switch.

Step 2: Press and hold the RB + BACK + RS + LOGO Button to turn on the controller until the breathing light Flashes, and then press and hold the BACK Button + B to turn off the controller. After that, press the LB + LOGO Button to turn on the controller again, select "change grip/order" to re-pair.

Step 3: If the controller has been already connected to the NS, you could re-connect by pressing the LB + LOGO Button of the controller, when there is no other device connected.

[The corresponding NS keys of the controller are as follows]

- | | | |
|-----------|-------------------------------|-------------------------------|
| BACK = - | TURBO+RS = Screenshot | SHIFT = HOME Button |
| START = + | *Short Press: Screenshot | *Short Press: Back to desktop |
| | *Long Press: Screen Recording | *Long Press: Menu Options |



IV CONNECT TO PC/ANDROID TV

[WIRELESS CONNECTION]




① Insert the wireless receiver into the USB interface of the device

Indicator lights flashes slowly while the wireless receiver pairing

② Press the Logo button to turn controller on , it will automatically connect with the device

The connection is completed when the controller vibrates and the indicator light turns normally on

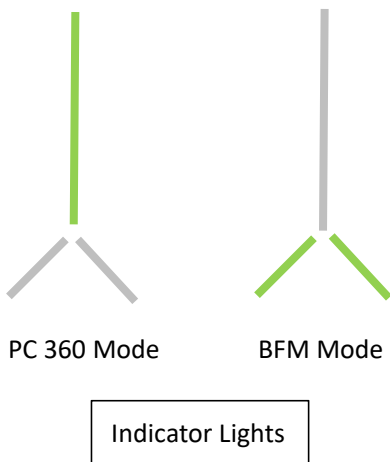

③ Press and hold Logo button for 3s to switch the controller mode

[PC360 mode]: The green light on the upper half is on for 3s

[BFM mode] : The green light on the lower half is on for 3s

④ Automatically paired for connection when the receiver is used again, while you press LOGO Button to start up

[WIRE CONNECTION]

① Connect the controller with device directly through USB cable. If the indicator light flash slowly, the controller is in charging state

② The connection is completed when the controller vibrates and the indicator light turns normally on

[BLUETOOTH CONNECTION FOR PC ONLY]

① Press LOGO Button + RB to turn on the controller in the power-off state.

② Open the Bluetooth interface of the PC, search for the named [**Xbox Wireless Controller**] for pairing. After successful connection, the indicator light 3 and 4 turns red 5 seconds.

V CONNECT TO iOS DEVICE

***Suitable for iOS 13.0 and above**

① Press LOGO Button + RB to turn on the controller in the power-off state.

② Open the Bluetooth interface of the device, search for the named [**Xbox Wireless Controller**] for pairing. After successful connection, the indicator light 3 and 4 turns red 5 seconds.

③ Support native games that can use the gamepad.

VI CONNECT TO ANDROID DEVICE

***Suitable for Android 9 and above**


① Press LOGO Button + B to turn on the controller in the power-off state.

② Open the Bluetooth interface of the device, search for the named [**BEITONG 2650NS BFM**] for pairing. After successful connection, the indicator light 3 and 4 turns red 5 seconds.

③ Support native games that can use the gamepad.

VII FEATURES FOR CONTROLLER


[SENSIVETITY KNOB OPERATION]

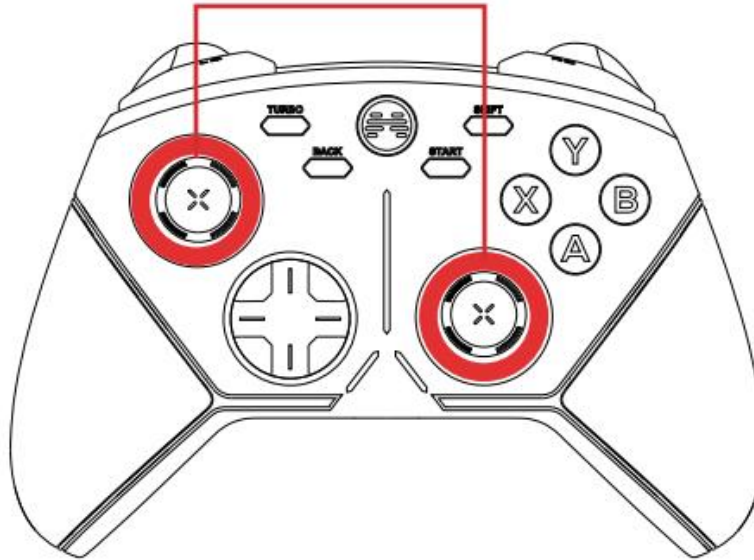

① Joystick sensitivity adjustable in real time :

A higher/lower gear could be adjusted when you rotate the knob three times each, while the three indicator lights are in the same color

② Indicator lights color & corresponding sensitivity

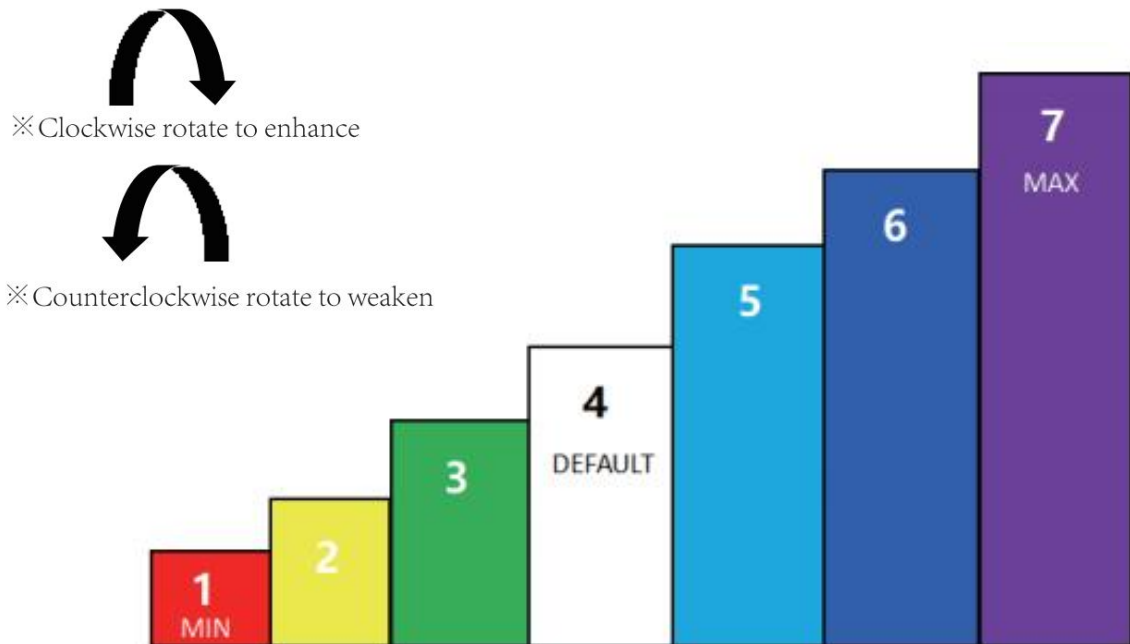

③ Knob Operations

※[Left knob] :Adjust the left stick. The indicator light flows to the left:indicator lights 1.3.4

※[Right knob] :Adjust the right stick. The indicator light flows to the right:indicator lights 2.3.4

※[Sensitivity enhance] :Rotate the knob clockwise. The indicator lights flows from the bottom up

※[Sensitivity weaken] :Rotate the knob counterclockwise. The indicator lights flows from the top down

※[Left/Right stick reset to default] : Press and hold [SHIFT] then press down the left/right stick,reset to default when the left/right side indicator light turns white for 3s

※[Reset to default simultaneously]: Press and hold [SHIFT] for 3s, the sensitivities of left and right sticks are reset to default when the indicator light 3 & 4 are off for 3s

[COUNTERWEIGHT & RECEIVER STORAGE]



① Handles of the controller can be opened along the gap, [7g] and [15g] counterweight blocks can be added to both sides, which can increase the weight for gripping hand feel

② In addition, the counterweight bin can be used as a [wireless receiver storage]

[TRIGGER STROKE ADJUSTMENT]

The trigger stroke of the LT/RT keys can be directly switched through the trigger lock on the back of the controller

※Long stroke: 19°, suitable for racing games

※Medium stroke: 11°, suitable for RPG games

※Short stroke: 5°, suitable for shooting and action games




SOFTWARE SUPPORT

*About the assistant software, it supports personalized function setting/key test/firmware upgrade. It's recommended to download according to gamer's needs, but do not affect basic use of the controller without downloading.

[BEITONG Gamepad Assistant For PC]

① Download the software "BEITONG Gamepad Assistant" from BEITONG official website:
<https://www.betop-cn.com/en/#/down>

(Note: If you enter the Chinese Official Website, please set the language in the upper right corner to English, and then click the DOWNLOAD enter into the download page.)

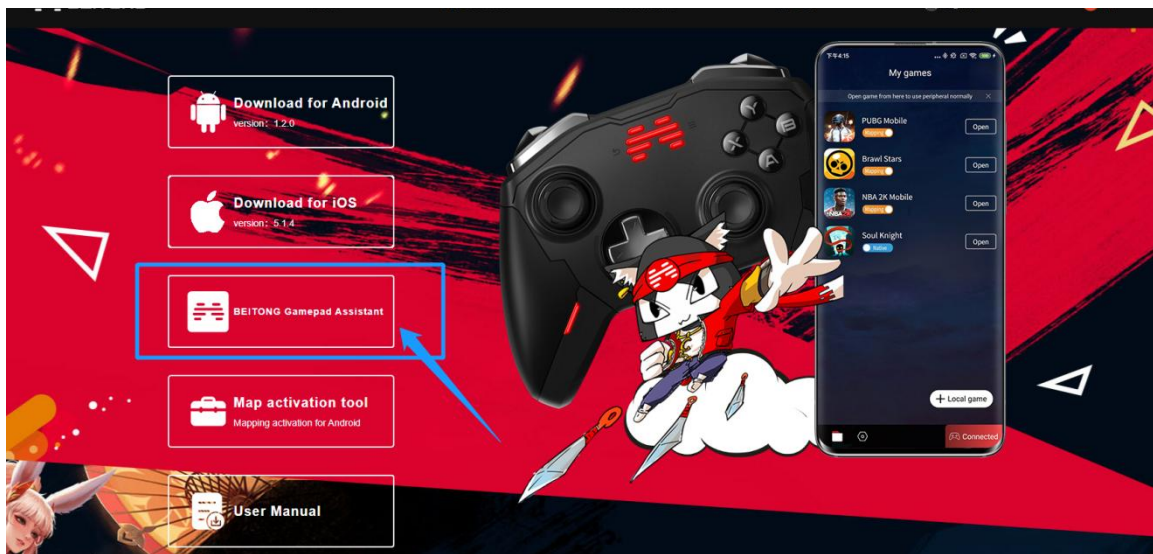

PC360 BFM

② In order to use the BEITONG Gamepad Assistant normally, the controller must be connected to the computer with USB cable

Press the BEITONG logo button to turn controller on and it'll be connected automatically

- ③ Run the software "BEITONG Gamepad Assistant" to set up the Controller function


**NOTE:**

- 1.It's recommended to confirm upgrade if prompted for a firmware upgrade, to experience any updated features.
- 2.In order to use the BEITONG Gamepad Assistant normally, the Gamepad must be connected to the computer with USB cable.
- 3.Please feel free to run our secure program,if it can't be downloaded and run normally, try again after closing the antivirus software.
- 4.If the firmware upgrade fails due to factors such as signal disconnection, disconnection or poor contact, please unplug the USB cable and then re-plug again to resume the firmware upgrade.

[BEITONG Gaming Hall For Mobile]

- ① Download the App from BEITONG official website on PC: <https://www.betop-cn.com/en/#/down>
- ② Select the corresponding version of App to download and install it on your mobile device.
- ③ Connect the controller to the device via Bluetooth to set up the Controller function or update the firmware.

*This Bluetooth connection method supports software configuration only: Press and hold LOGO Button + B to turn on the controller, search for the named [**BEITONG 2650NS BFM**] to connect.

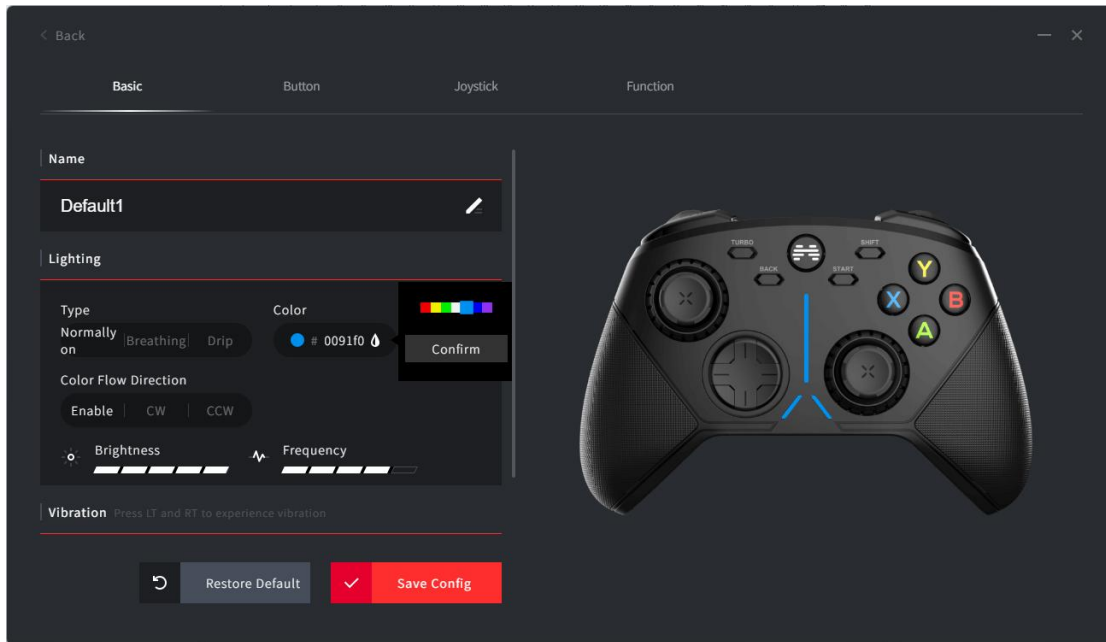[Asura 3S NS PC Gamepad Assistant Introduction]**① Lighting adjustment****[Change configuration name]****[Change indicator light's flicker mode]:**

※ Normal: All lights are on ※ Breath: All lights change in breathing state

※ Drip: Light flows from the top down

[Change light color] : 9 colors can be selected totally**[Switch color flow direction]**: according to the color table order

※ Single color: All lights are normally on in a single color

※ Clockwise: All lights switch in clockwise colors


※ Counterclockwise: All lights switch in counterclockwise colors

[Brightness adjust of lights]: 5 levels are optional**[Frequency adjust of lights switching]**: 5 levels are optional**② Vibration adjustment****[Intensity]** : Adjust the intensity of vibration feedback of the gamepad

③ Key functions setting

※LB, RB, M1 and M2 keys can be customized to set macro and mapping for other keys

※Other keys on the gamepad can only be customized to set mapping

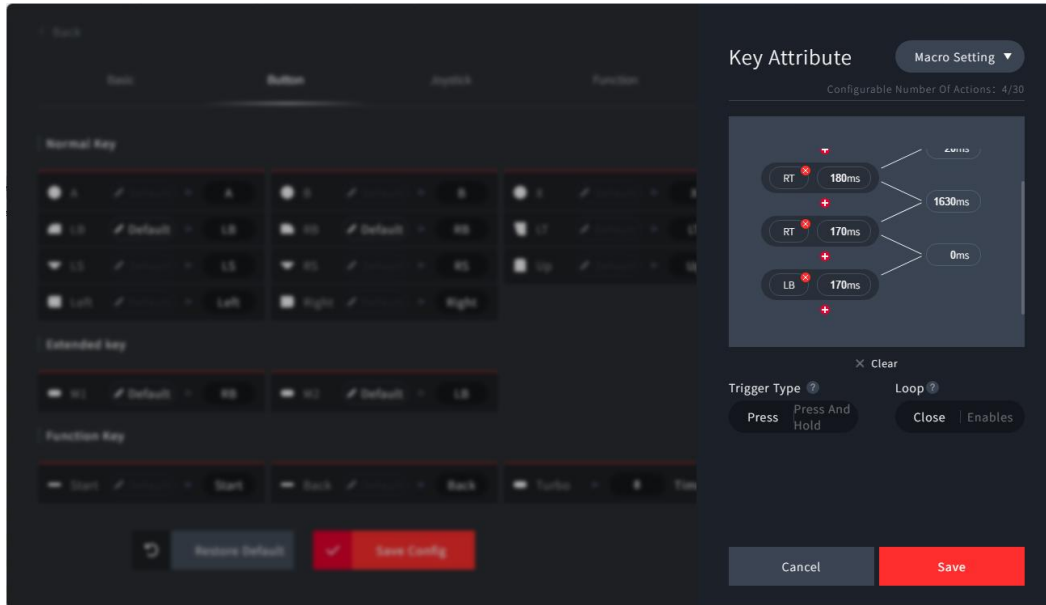

[Key value mapping]

For example, Key A is mapped to Key B to trigger the action of B when A is pressed.

Click the input box after the arrow of Key [A] to delete the key value.

Press Key B on the gamepad to map Key [A] to Key [B].

[Macro Programmable]


LB, RB, M1, M2 keys can be set for macro programming

One button can be set to have a maximum of 32 actions

You can record the [Action], [Duration] and [Interval] between each action in combo operations in real-time, and fine-tune them in milliseconds.

④ Joystick Sensitivity Setting


The sensitivity curve can be viewed in real time, which can be achieved by rotating the speed control knob of stick or knob + custom key.

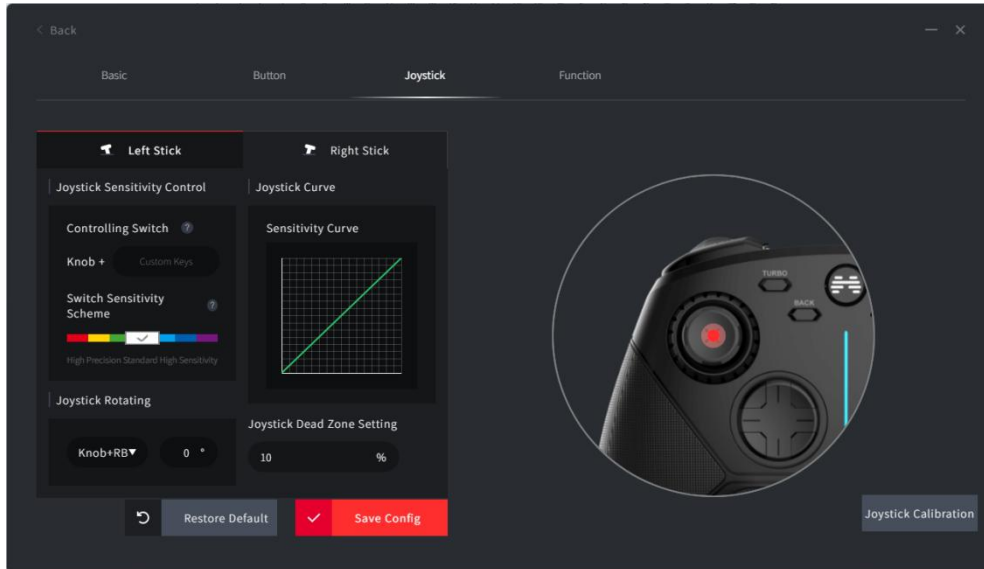


⑤ Somatosensory Setting

The somatosensory can be mapped to joystick or button, depending on the game, you have to choose the mode of operation: immediate/continued, often used in shooting aiming, driving, secondary action and other game scenarios.

If slight movement is unresponsive, add [compensate for joystick dead zone of game].

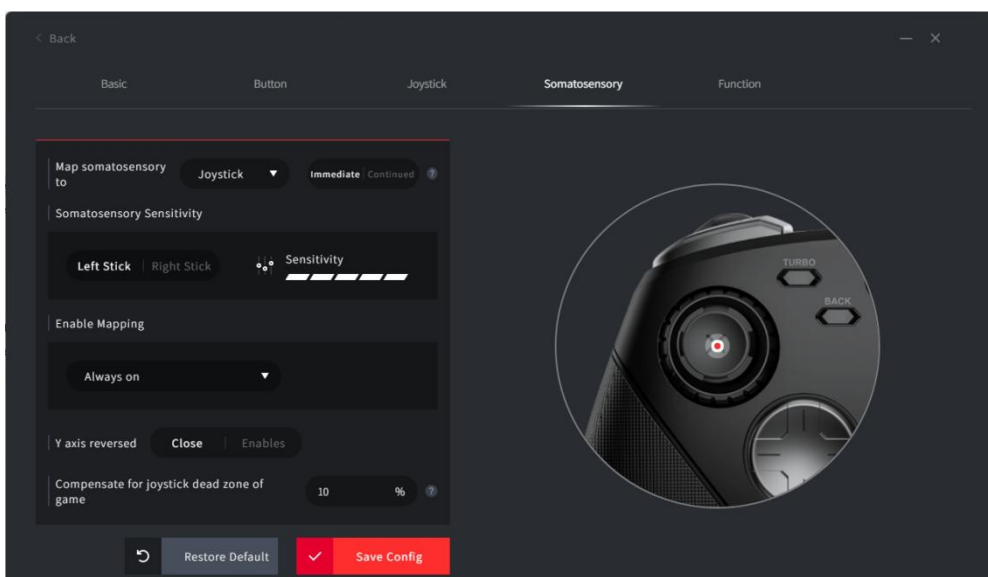

⑥ Joystick & Trigger Calibration

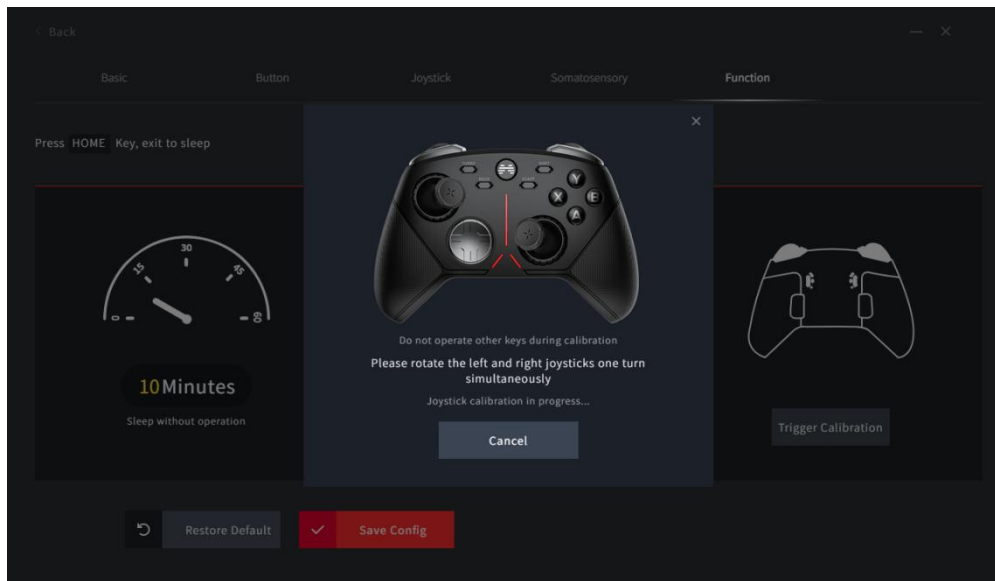

[Joystick Calibration]

Rotate the left and right joysticks one turn simultaneously

[Trigger Lock Calibration]

Turn the trigger lock on both sides from long stroke to shortest stroke, press B twice to calibrate.

[Trigger Calibration]

Three strokes, each stroke press down the two triggers to the end

IX OTHER FUNCTIONS AND BATTERY**[TURBO FUNCTION]**

[TURBO + Action Key]

**① Enable:**

Press and hold [Action Key] and then press [TURBO Key].

When the gamepad vibrates once, it indicates that TURBO function is enabled

② Disable:

Press and hold [Action Key] that enabled the TURBO function, and then press [TURBO Key]

*Action Button mean A,B,X, Y, LB, RB, LT, RT

[JOYSTICK D-PAD SWITCH]

[SHIFT Key] To Switch

Press gently [SHIFT Key] to enable/disable the function of switching between the joystick and direction keys

[CHARGING & BATTERY LIFE]**① Battery Life**

Built-in 950mAh lithium battery, with TYPE-C USB data cable attached to the package

Battery life is up to 80 h when the controller is fully charged and about 40h when the it is in normal use

② Charging Mode

[Charging by connecting to the computer / TV with a cable]

[Charging with a phone charger]

When you play a game with a cable connected to the computer/TV, the gamepad will be charged synchronously

③ Charging Indicator Light Prompt

The indicator light will be in breathing state when charging, and in normally on state when fully charged

※Power on state: None

※Power off state: Color flows clockwise, frequency is level 3

※0-25% Power: Indicator light 1,2,3,4 flow

※ 25%-50% Power: Indicator light 1 normally on, 2,3,4 flow

※50%-75% Power: Indicator light 1,2 normally on, 3,4 flow

※75%-99% Power: Indicator light 1,2,3 normally on, 4 breathing

※Full charge: Indicator light 1,2,3,4 normally on in white

When the battery power is lower than 20%, the indicator lights 1 and 2 will flicker in red quickly

FAQ

Q How to upgrade the firmware ?

- A**
1. Visit the download page of BEITONG official website.
 2. Click [BEITONG Gamepad Assistant] to download the program.
 3. Connect controller & PC by USB cable, run betopgame.exe program to start the Gamepad Assistant
 4. Confirm firmware upgrade and wait.

Q How to troubleshoot when it cannot be turned on normally?

- A**
1. Please confirm whether the power of the controller is sufficient.
 2. Connect the power supply through the data cable and observe whether the indicator light of the controller is flashing.
 3. Connect the computer with the data cable to confirm the status of the controller.
 4. If none of the above methods can solve the problem, please contact customer service.

Q Why can't the controller connect with other terminal devices using Bluetooth?

- A**
1. Please make sure the Bluetooth function of the terminal device is turned on.
 2. Please make sure that the controller has been turned on normally and that the power of the controller is sufficient to support the normal use of the controller.
 3. If the terminal device has been connected to the controller before, please delete the old pairing information of the controller in the Bluetooth setting page of the terminal device, restart the Bluetooth function and try to connect again.
 4. If none of the above methods can solve the problem, please contact customer service.

Q How to solve the abnormal phenomenon of disconnection during the use of the controller?

- A**
1. Avoid using the controller in an environment where there are too many Bluetooth devices.
 2. Avoid connecting the terminal device to more than one Bluetooth device at the same time.
 3. Avoid the use of metal or other obstacles to block the straight line distance between the controller and the terminal device.

Product Specification

Name	BEITONG Asura 3S Wireless Gamepad Multi Mode
Model	BTP-2650NS
Power Supply	950mAh Rechargeable Lithium Ion Battery
Connection	2.4G Wireless, Bluetooth, USB Cable
Size	155*110*62mm
Weight	About 244G
Adaptation platform	PC Window 7 and later, Android Device, iOS Device, Nintendo Switch
Package Include	Gamepad x 1, USB Cable x 1, Receiver x 1, Replaceable D-pad x 1, Counterweight x 4, User Manual x 1

Customer Service

Dear customer,

Thanks for using BEITONG gaming peripheral products.

We focus on providing gamer with a better gaming experience, please provide the information through your email for customer service:

a. Purchasing Channel b. Buyer ID c. Order Number d. Product Model

Please provide the below information for us according to the product situation :

1. Please provide service reason

a. Function is not good b. Bad appearance c. Can not use in my device

d. Can not play the game i want to play e. Other reason

2. Please provide the service you need

a.Replacement b. Repairing c. Return d. Other

Customer service contact: beitong-oversea@betop-cn.com

We also welcome our customer to provide suggestion so that to improve and upgrade our product. Any good idea for our products, please feel free to contact us. It's very grateful. Meanwhile we'll select the customer who in high-quality advice to experience our new products for free opportunity.

Sincerely

BEITONG Customer Service Team

ABOUT BEITONG

Leading brand of smart gaming peripherals in China
Been focusing on game controller and software development more than 25 years
Sticking on quality, function and innovation
Customizing professional control solutions for different types of games
Creating the stronger experience of game control for gamers

CUSTOMER SERVICE

Official website: <https://www.betop-cn.com/en>

Service Email: beitong-oversea@betop-cn.com

More products and game information, please follow BEITONG official social media accounts.



Official YouTube



Official Amazon



Official Website